



EZPLC-D-96 Specifications




MODULES NOT INCLUDED WITH BASE

| Model Number | Interface |
|------------------------|---|
| EZPLC-D-96 | DC Power – 96 I/O Base comes with RS232 port 1 and RS422/485 port 2, and a Male connector for plugging in DeviceNet or Profibus option cards |
| EZPLC-D-96E | DC Power – 96 I/O Enhanced Ethernet Base comes with RS232 port 1, RS422/485 port 2, Ethernet port 3 and a Male connector for plugging in DeviceNet or Profibus option cards |
| EZPLC-DEVICENET | DeviceNet Interface Card |
| EZPLC-PROFIBUS | Profibus Interface Card |
| EZPLC-EDIT | Programming Software |
| EZ-PGMCBL | Programming Cable 3 meter |

No limitation on I/O module location except:

- 1) Bottom left module can only be DC I/O module
- 2) Analog input and output combination module can be configured only in the first 4 slots and cannot be mounted on the bottom left position
- 3) Analog I/O modules can be configured only in the first 10 slots

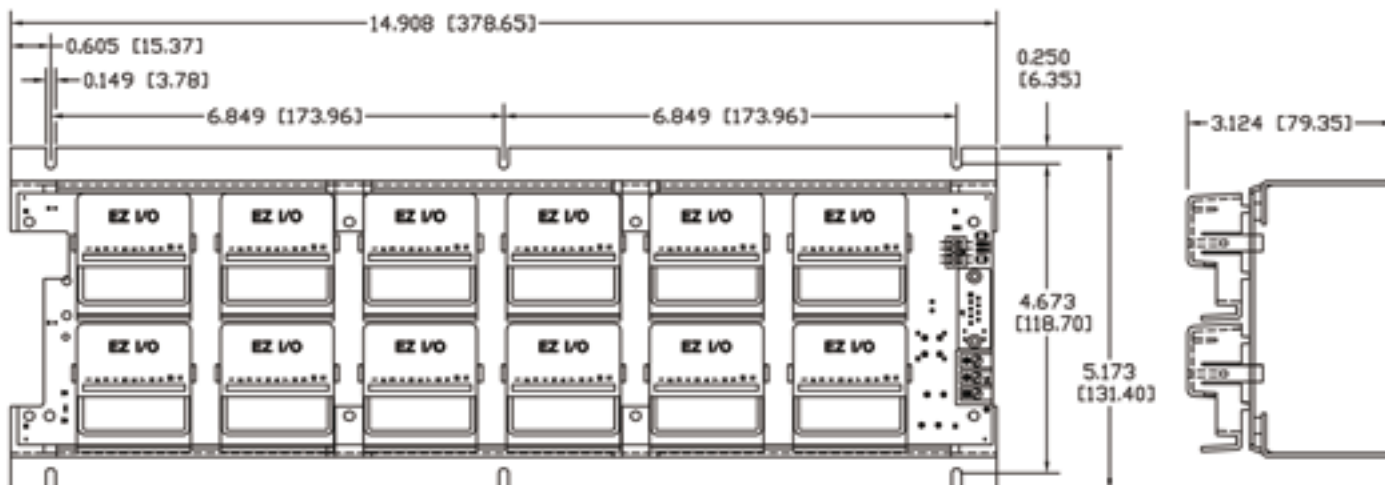

all Dimensions in mm